




OVS

OVERLAND VEHICLE SYSTEMS

Cantilever Roof Top Tent Annex Room Instructions

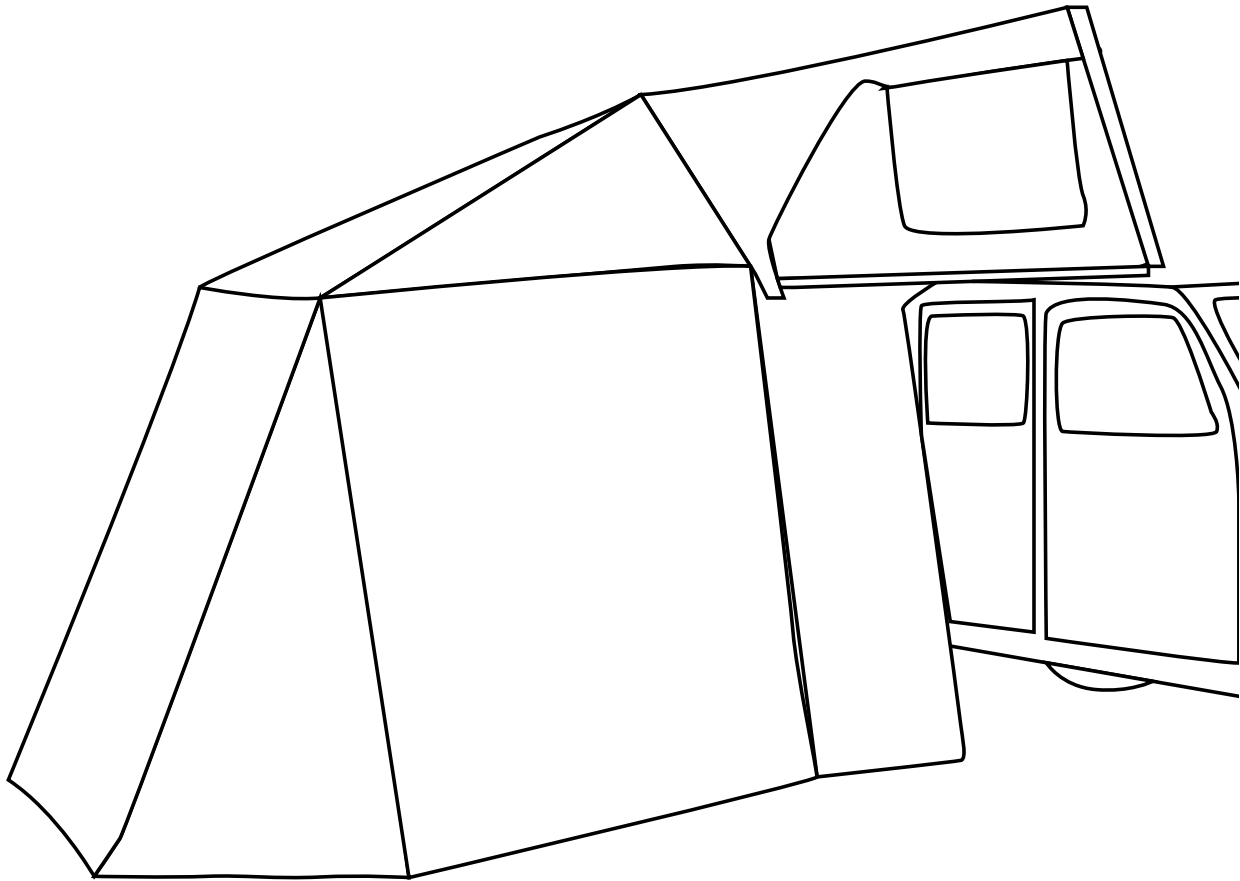

**CAREFULLY READ INSTRUCTIONS PRIOR
TO THE FIRST USE OF THE CANTILEVER
ROOF TOP TENT ANNEX ROOM**

**WORKS WITH XD EVEREST ANNEX AND
HD BUSHVELD ANNEX ROOM**


Cantilever Roof Top Tent Annex Room

SET-UP & CARE INSTRUCTIONS

INSTALLATION


1

Zip the annex room opening to the perimeter of the zipper on the rainfly entrance of the tent
Then slide the c-channel rail of the annex to the bottom extended panel of the tent


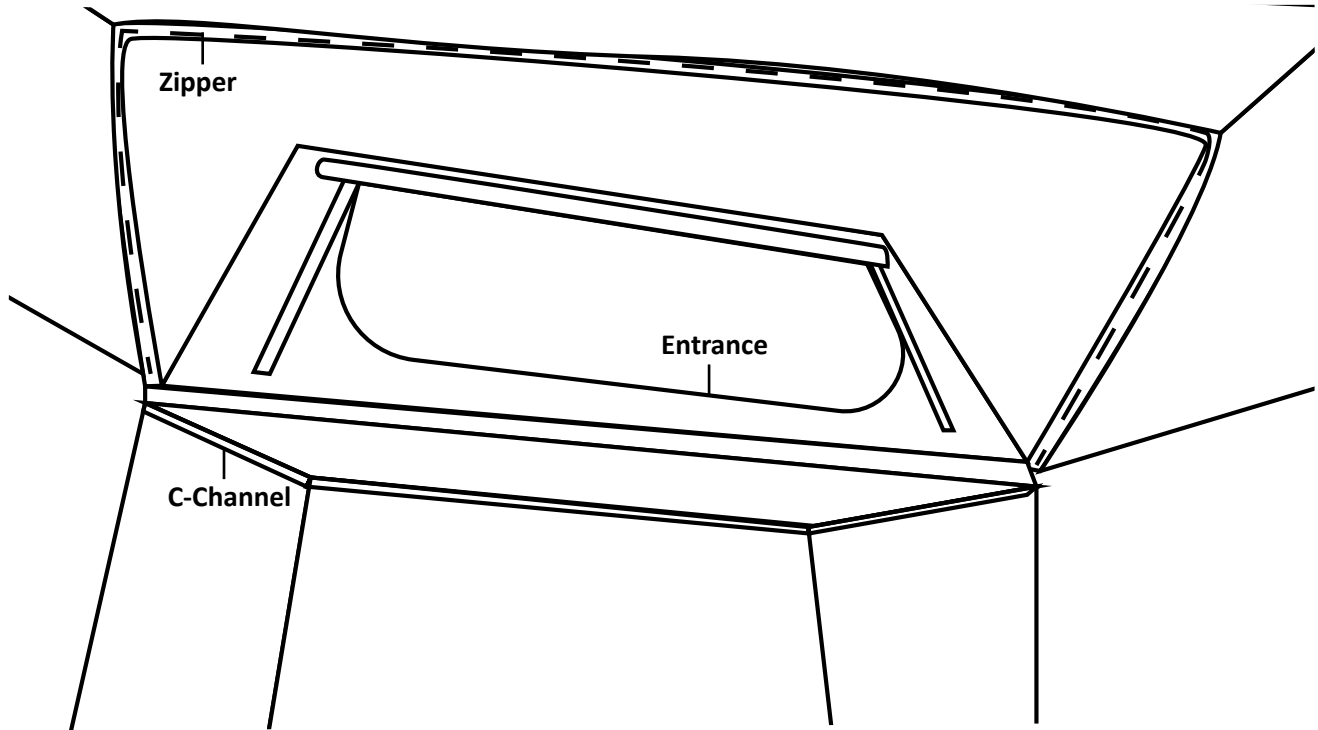


2

Install the 2 interior Telescoping Poles to keep the front of the annex taut

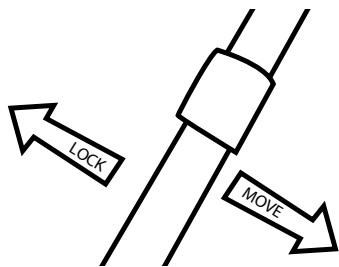

You may need to attach a guide line to the pole and stake down the guide line to the floor

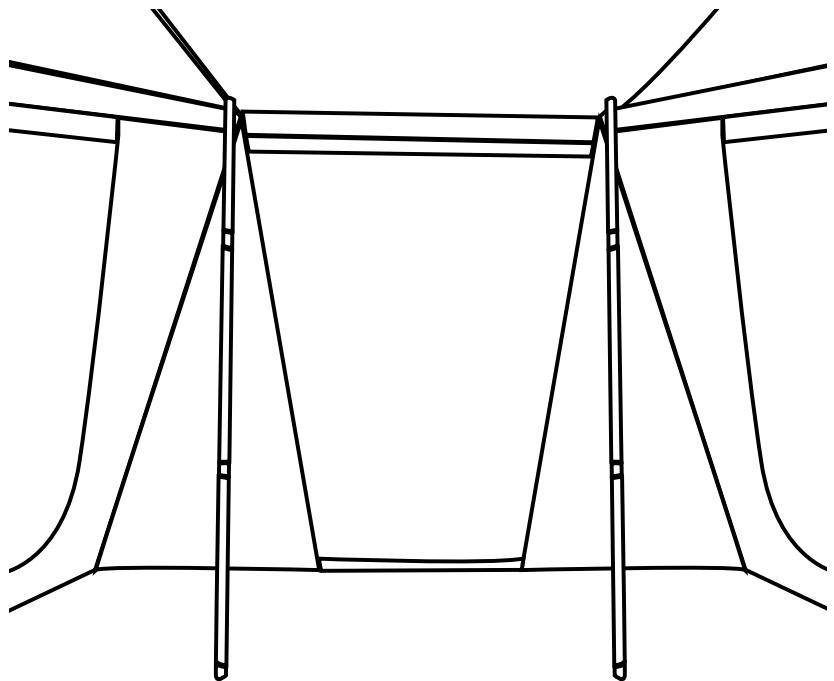
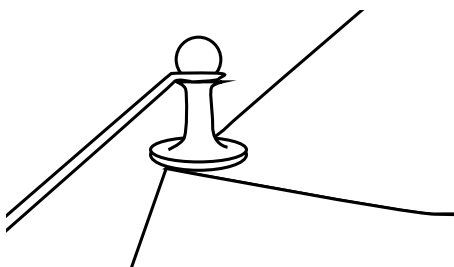


Cantilever Roof Top Tent Annex Room

SET-UP & CARE INSTRUCTIONS

3

Use the provided stakes to the loops and hammer/
mallet them down to secure the and expand the fabric

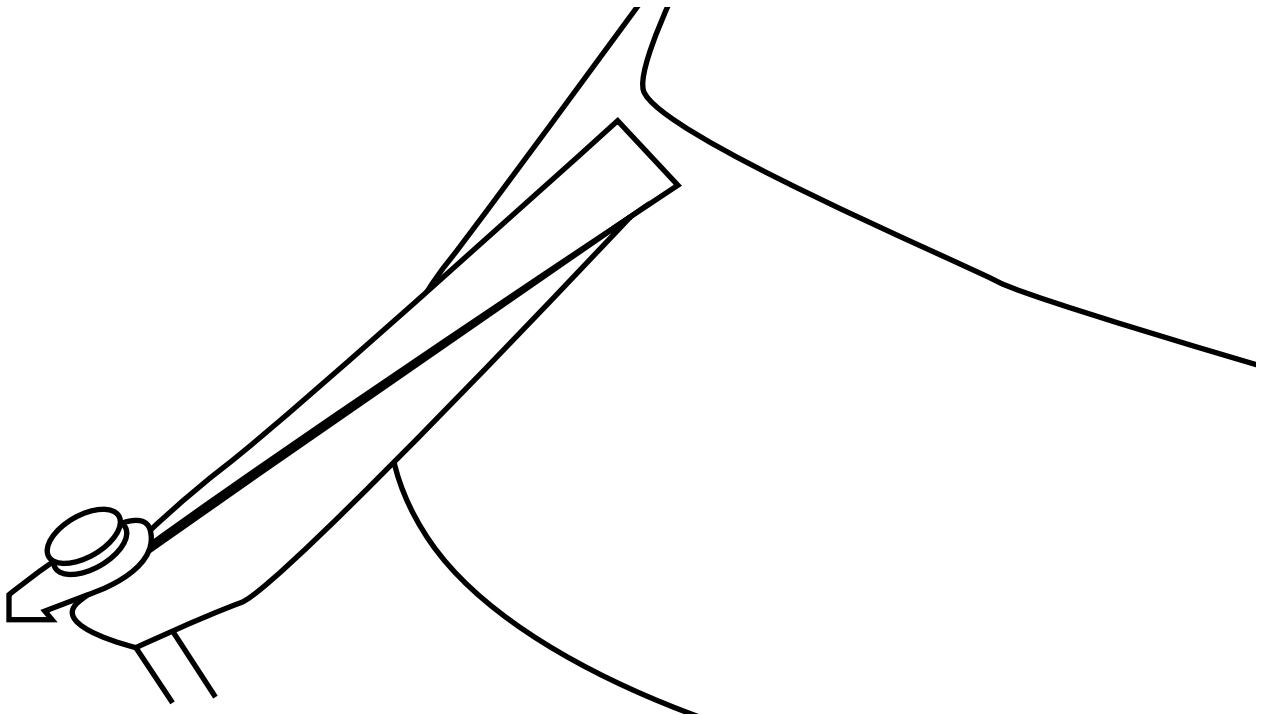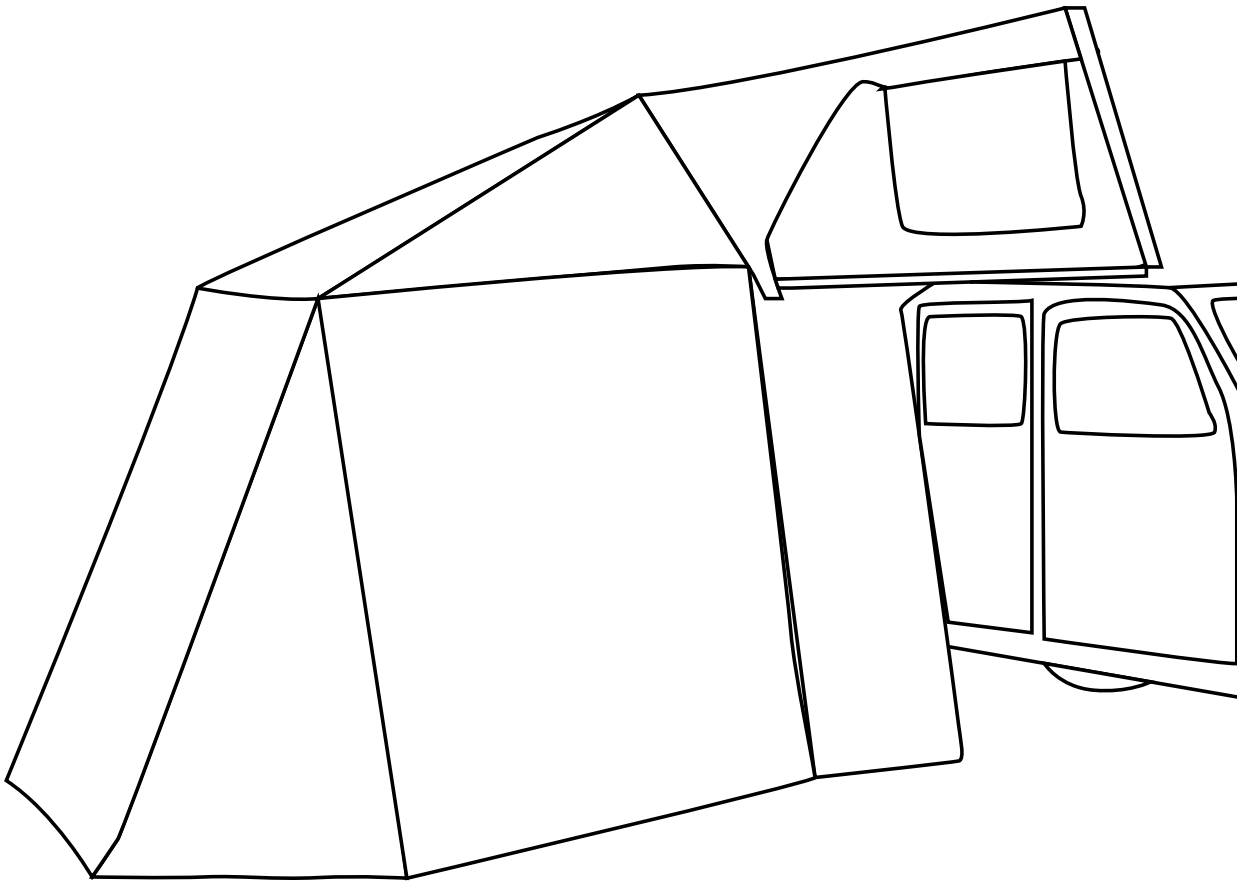

Cantilever RTT Annex Room

SET-UP & CARE INSTRUCTIONS

CLEANING

Materials Needed:

- Mild soap
- Cold Water
- Soft Brush

Tips:

- Avoid abrasive cleaners and harsh chemicals.
- Clean regularly to maintain appearance.

WARRANTY

XD Annex Room: 6 Year Fabric Warranty
Limited Lifetime Structural Warranty

HD Annex Room: 4 Year Fabric Warranty



WARNINGS

- **Secure Setup Required:** Always fully secure the annex to the tent, ladder, and ground before use. Loose attachment can cause collapse or injury.
- **Weather Conditions:** Do not use the annex in high winds, heavy rain, or snow without proper staking and guy lines. Severe weather can cause structural failure.
- **Fire Hazard:** Keep all open flames, heaters, stoves, and grills away from the annex. Fabric is flammable and may ignite quickly.
- **Carbon Monoxide Risk:** Never use fuel-burning devices inside the annex. This can lead to serious injury or death from carbon monoxide poisoning.
- **Proper Ventilation:** Ensure adequate airflow at all times. Lack of ventilation can lead to condensation buildup and unsafe breathing conditions.
- **Trip Hazard:** Be cautious of stakes, guy lines, and uneven ground around the annex to prevent trips and falls.
- **Weight Load:** Do not hang heavy items from annex walls or ceiling unless specifically designed to support weight.
- **Children Supervision:** Always supervise children when using the annex. Improper use can result in injury.
- **Zipper Use:** Do not force zippers. Forcing may cause damage and compromise enclosure integrity.
- **Water Accumulation:** Do not allow water to pool on the annex roof or seams. Excess weight can cause sagging or collapse.
- **Proper Storage:** Ensure the annex is completely dry before storage to prevent mold, mildew, and material degradation.
- **Vehicle Stability:** Ensure the vehicle and rooftop tent are parked on level ground and properly secured before attaching or using the annex.
- **Not a Permanent Structure:** The annex is designed for temporary use only. Prolonged exposure to harsh conditions may reduce product lifespan.
- **Inspection Before Use:** Check for tears, damaged poles, or worn components before each use. Do not use if damaged.



DO YOU NEED OUR HELP?



CUSTOMER SUPPORT 833-226-4863



SALES@OVERLANDVEHICLESYSTEMS.COM

WANT TO SHOW US YOUR RIG?
CHECK OUT OUR SOCIAL!

@overlandvehiclesystems



APRIL 2026