




# OVS

OVERLAND VEHICLE SYSTEMS

## XD Nomadic Pivot Shower Awning Instructions

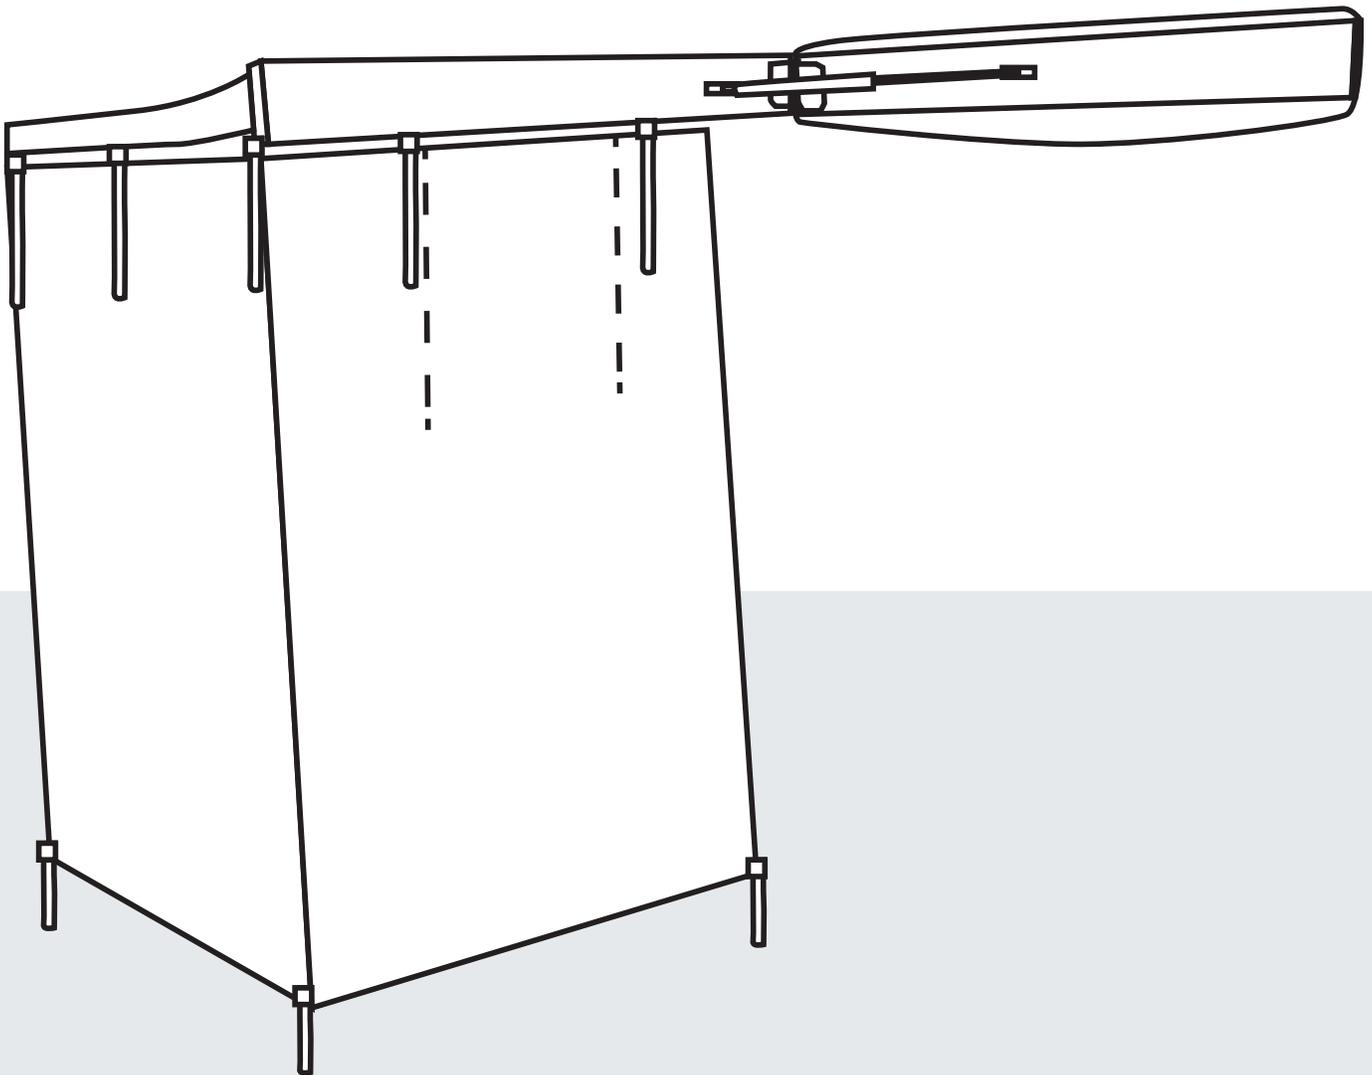

**CAREFULLY READ INSTRUCTIONS PRIOR  
TO THE FIRST USE OF THE  
XD NOMADIC PIVOT SHOWER AWNING**

# XD Nomadic Pivot Shower

SET-UP & CARE INSTRUCTIONS

## GET TO KNOW YOUR SHOWER AWNING

We recommend you check all parts are included prior to first use.

### COMPONENTS NEEDED

2x L-Brackets

8x M6 Stainless Steel Bolts

8x Nylon Lock Nut


2x Guide Ropes

2x Stakes



## INSTALLATION

### IMPORTANT!



Before mounting your shower awning make sure that it clears the door openings, lift up tailgate, aerials or other obstructions on the vehicle.

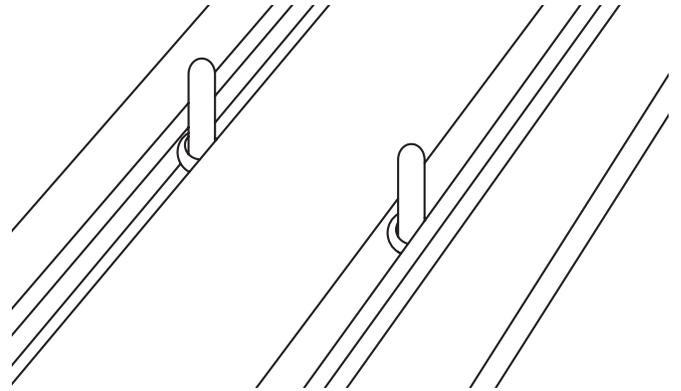

**NOTE:** Your shower awning can be mounted directly to the side of a roof cage by simply drilling four 6.5mm holes into the side supports and attaching using the bolts and nylon nuts supplied. Alternatively, you can use the supplied 'L' brackets and mounting hardware in the various configurations shown below

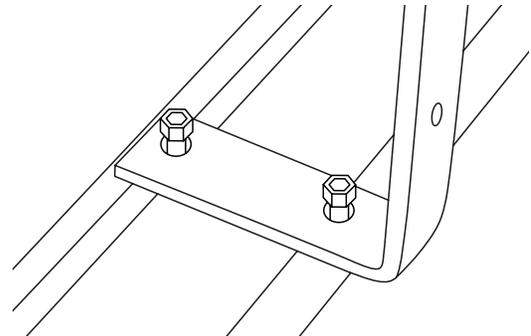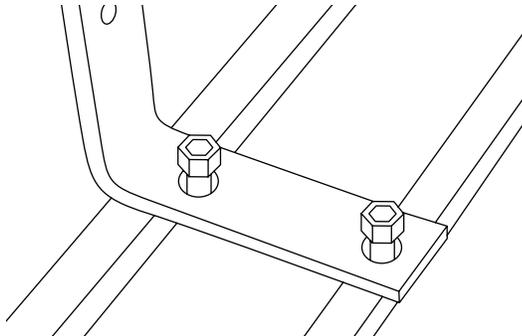

The shower awning can now be attached to the roof rack or roof bar as shown in the following diagrams. **IMPORTANT:** In some cases, 6.5mm holes will need to be drilled to attach brackets.

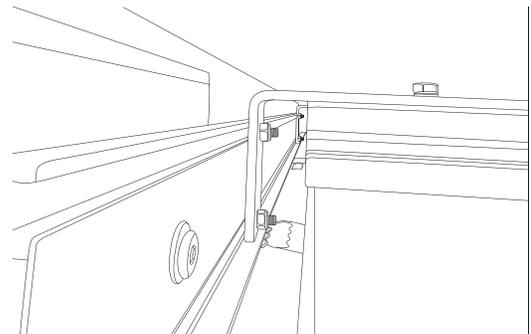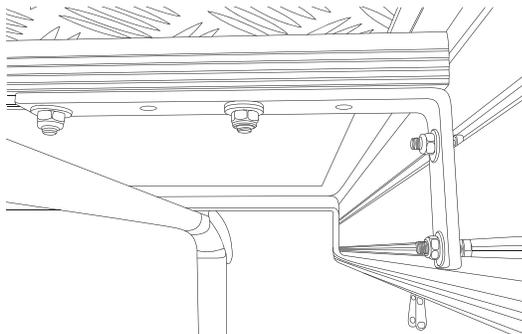


# XD Nomadic Pivot Shower

## SET-UP & CARE INSTRUCTIONS




1

Unzip weather resistant cover and release the velcro straps, allowing the fabric to be released.

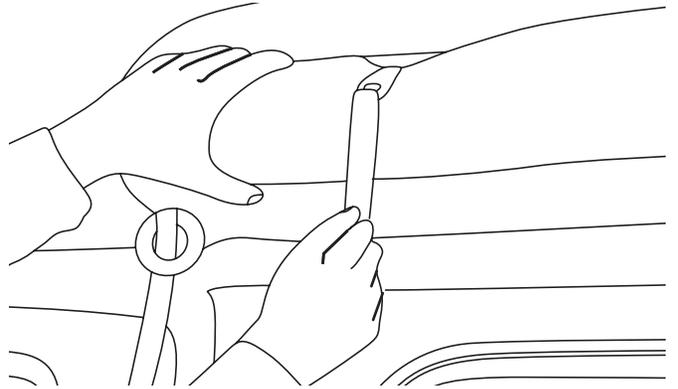

2

Move the arms outwards and lock in place.

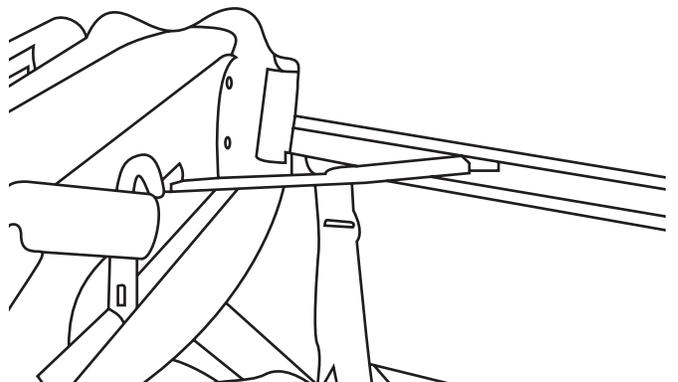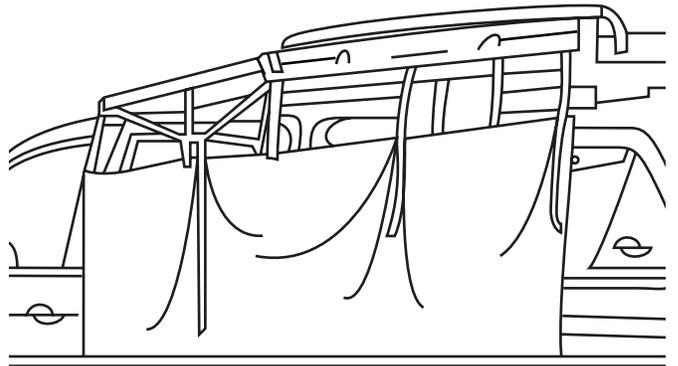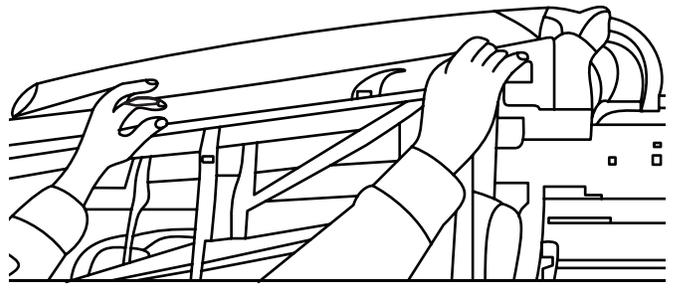


# XD Nomadic Pivot Shower

## SET-UP & CARE INSTRUCTIONS


3

Unfold the fabric and allow it to hang, adjust the webbing straps at the top to achieve the required height from the ground

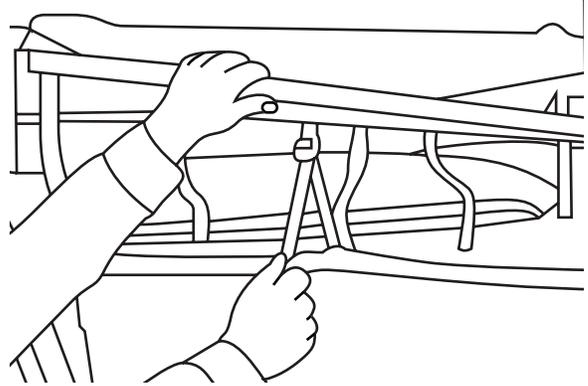


4

Peg out the four corners and tension the webbing straps as required

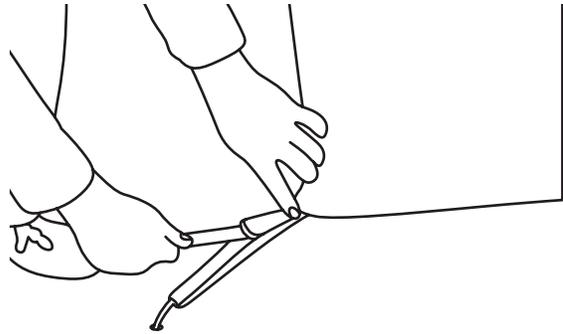

5

Unhook the tabs near the base to roll out and taut the roof to the corners of the shower

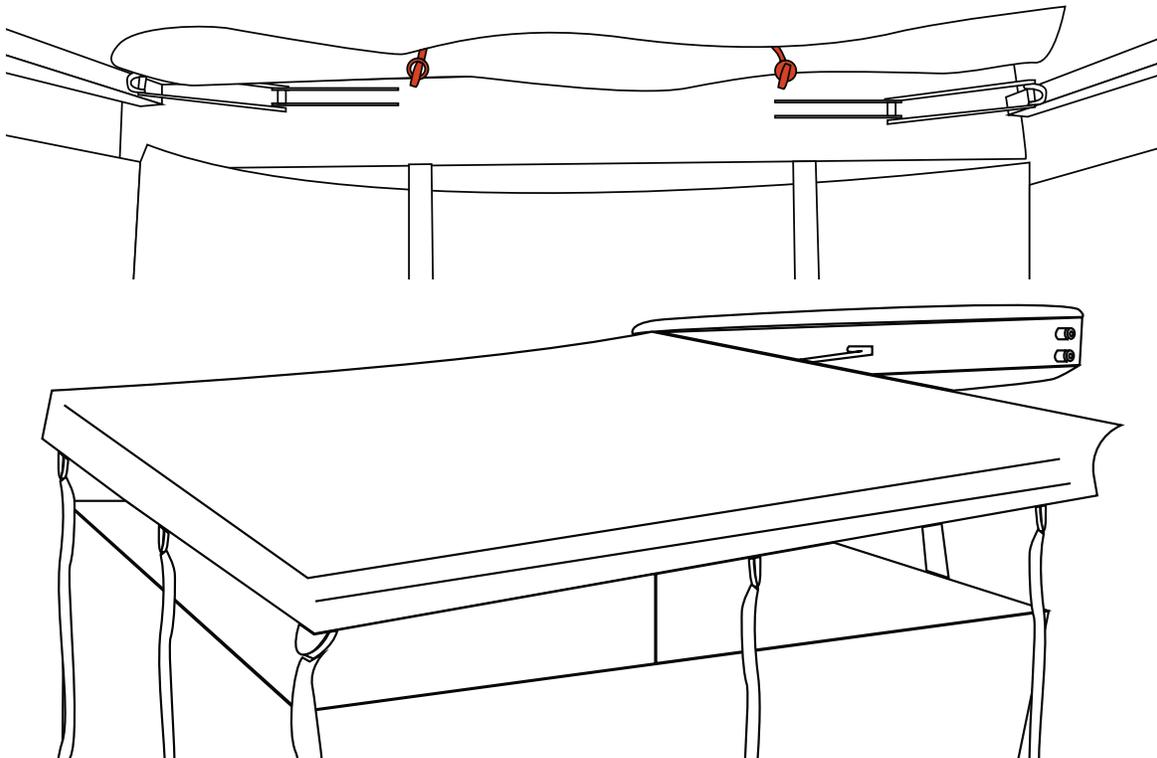


# XD Nomadic Pivot Shower

SET-UP & CARE INSTRUCTIONS

## HOW TO USE THE PIVOT FUNCTION


6

Detach the velcro strap on the pivot base

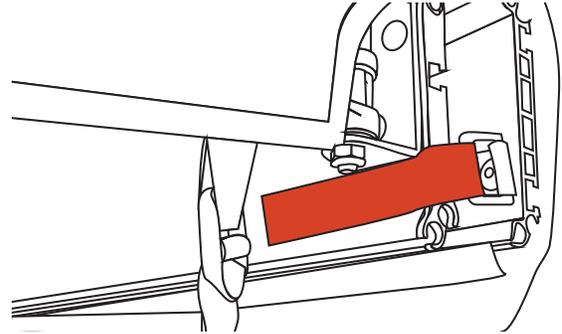

7

Slowly bring out the awning to your left and the open-assist gas charged struts should automatically bring pivot the awning.

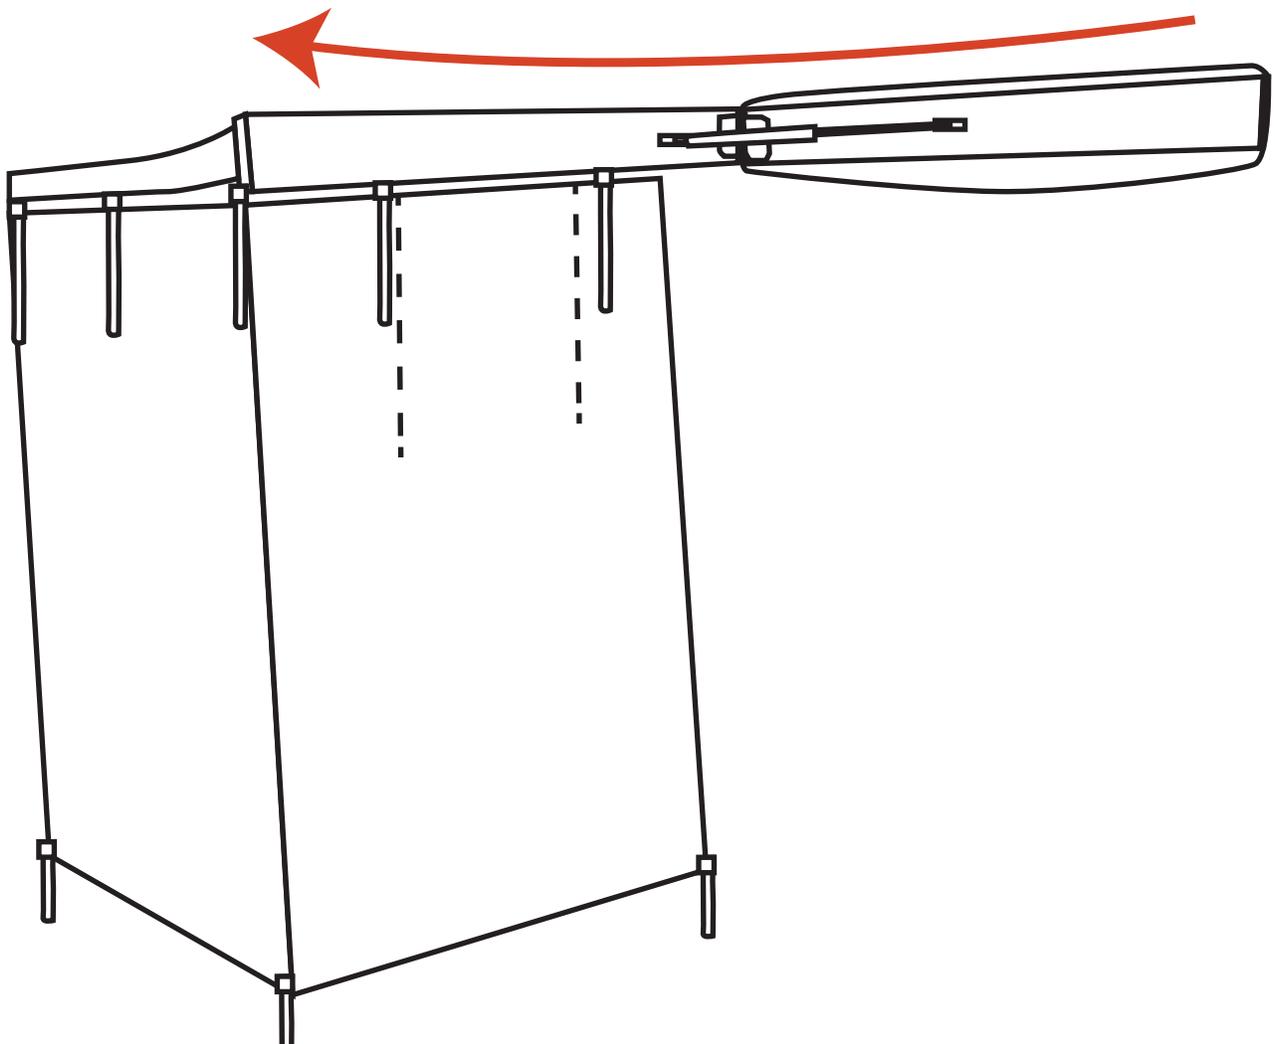

# XD Nomadic Pivot Shower

## SET-UP & CARE INSTRUCTIONS

APRIL 2025

### CLEANING

Clean only with cold water and soft brush - Do not use soap or detergent. Do not expose to petrol, oil, or solvents. Avoid creases and seams when rolling up the awning.

### STORING

1. Clean and dry the awning
2. Fold all of the components into the travel cover
3. Roll the tent, using the pole bag as a guide
4. Secure with awning and straps into the travel cover
5. Store in a cool, dry place

### WIND RATINGS

Freestanding: 5-10 MPH

With Poles, Stakes, and Guy Lines: 25 MPH

## WARNINGS

- THE AWNING HAS BEEN DESIGNED FOR GENERAL CAMPING USE UNDER NORMAL CONDITIONS. ALWAYS ENSURE ALL GUY ROPES ARE ANCHORED CORRECTLY. IT MAY BE NECESSARY TO RE-ADJUST GUY ROPES AND PEGS AT TIMES TO MAINTAIN THE STRUCTURAL INTEGRITY OF THE AWNING.

- TO AVOID CHANCES OF PERSONAL INJURY AND PROPERTY DAMAGE, WE HIGHLY RECOMMEND THE NOMADIC AWNING SHOULD NOT BE ERECTED DURING WINDY CONDITIONS.

\* IN WINDY CONDITIONS IT IS HIGHLY RECOMMENDED NOT TO ERECT THE AWNING AND WALLS AS PERSONAL INJURY AND OR PROPERTY DAMAGE MAY OCCUR.

- DO NOT CUT OR MODIFY THE AWNING OR MOUNTING ACCESSORIES.

- DO NOT EXCEED THE VEHICLE MANUFACTURER'S WEIGHT LIMITS.

- DO NOT USE DAMAGED OR EXCESSIVELY WORN PRODUCTS. CONTACT US IF YOU ARE UNSURE.

- KEEP ALL FLAMES AND HEAT SOURCES AWAY FROM THE FABRIC

- UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE AWNING, KEEP FIRES AWAY FROM THE AWNING

- KEEP A LOOK OUT FOR ANY AIRBORNE BURNING EMBERS THAT MAY COME IN CONTACT WITH THE TENT. KEEP A FIRE EXTINGUISHER OR BUCKET OF WATER NEAR BY.

- DO NOT OPERATE ANY DEVICES WHICH BURN FUEL INSIDE THE AWNING WHILE THE WALLS ARE ATTACHED.

- KEEP EXITS CLEAR

- REMAIN CAUTIOUS WHEN GUIDE ROPES ARE IN USE

- KEEP AN EYE OUT FOR CHILDREN WHEN AWNING IS IN USE

- STOW AWAY AWNING BEFORE OPERATING VEHICLE



## DO YOU NEED OUR HELP?



CUSTOMER SUPPORT 833-226-4863



SALES@OVERLANDVEHICLESYSTEMS.COM

WANT TO SHOW US YOUR RIG?  
CHECK OUT OUR SOCIAL!

@overlandvehiclesystems

